

## Smooth Virgin PFA Tube

### TYPE PS

#### Construction:

Type PS is smooth tube manufactured from PFA material.


#### Temp. Range:

-40° C and 260° C.

#### Applications:

For transfer of high purity products, chemicals, dairy and cosmetic products.

Also suitable for heat exchangers and as protective sleeve for cables. They have excellent heat resistance, viscosity, chemical resistance, electrical insulation, etc.

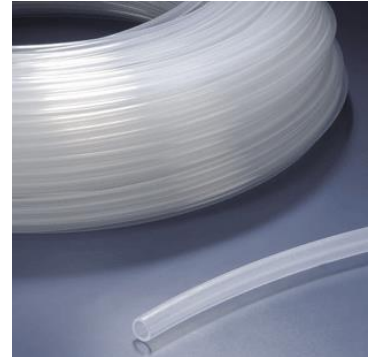

Part no.	ID mm	OD mm	Tube Wall Thickness mm	Length m/roll
PS002004	2	4	1	100
PS003004	3	4	0.5	100
PS004006	4	6	1	100
PS006008	6	8	1	100
PS008010	8	10	1	100
PS010012	10	12	1	100
PS0039600635	3.95	6.35(1/4")	1.2	100
PS0063500953	6.35	9.53(3/8")	1.6	100
PS009530127	9.53	12.7(1/2")	1.6	100
PS0158701905	15.87	19.05(3/4")	1.6	100
PS02220254	22.2	25.4(1")	1.6	100